


POSITION JUMPER ON PINS AS SHOWN FOR AN OUTPUT GAIN OF +1.

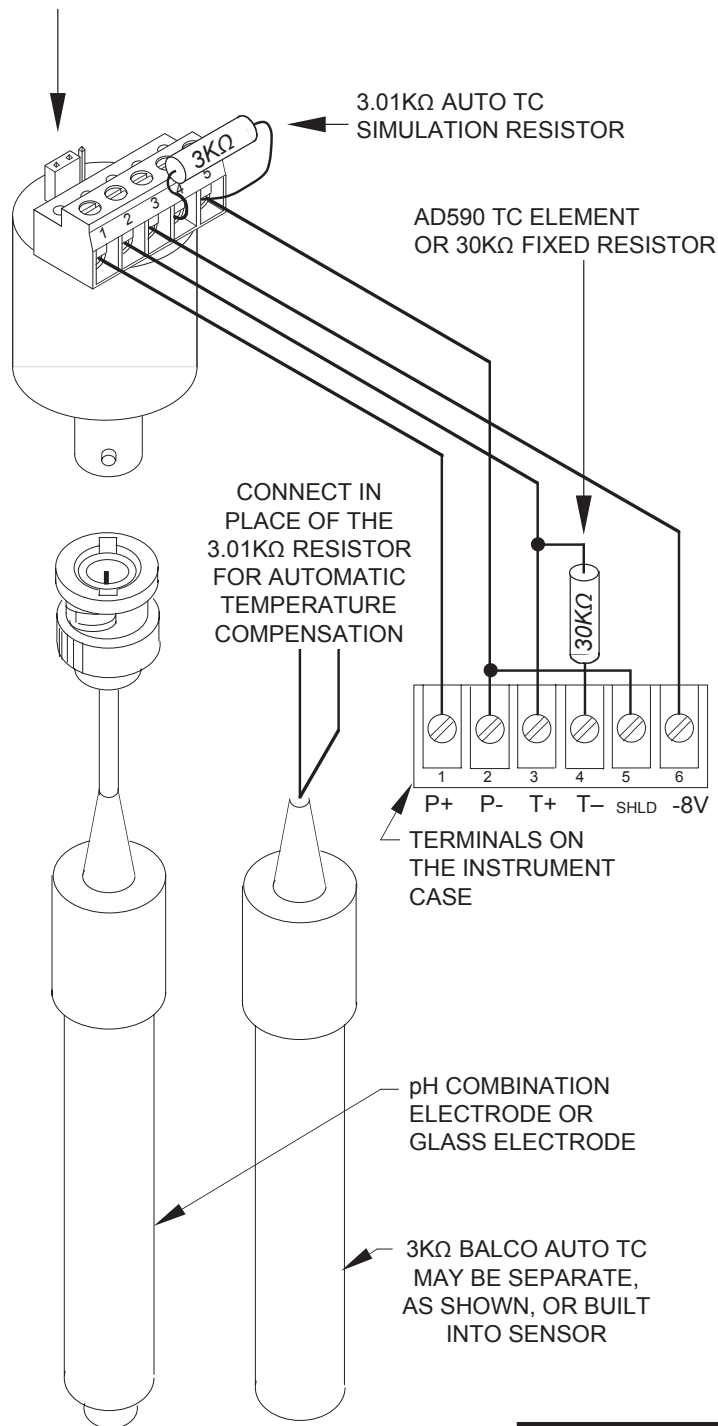

NOTES :

GENERAL

OUTPUT TO THE INSTRUMENT FROM THE PREAMP IS A GAIN OF +1.

WHEN A COMBINATION ELECTRODE IS USED, REFERENCE CONNECTION IS MADE THROUGH THE BNC CONNECTOR. USE OF A SEPARATE REFERENCE REQUIRES A CONNECTION TO TERMINAL 5 ON THE PREAMP.


TEMPERATURE COMPENSATION

STANDARD MK719 TC IS ACCOMPLISHED WITH AN AD590 ELEMENT ACROSS T+ AND T-. THE SSA AMPLIFIER CAN ALSO PERFORM AUTOMATIC COMPENSATION USING A 3KΩ AT 25°C BALCO ELEMENT, WITH A SLOPE OF +13.5Ω/°C. THE AMPLIFIER SHIPS WITH A 3.01KΩ RESISTOR BETWEEN TERMINALS 4 AND 5 TO SIMULATE 25°C. IF A 3K BALCO ELEMENT IS USED, THIS RESISTOR MUST BE REMOVED. ONLY ONE AUTO TC CAN BE USED AT ONE TIME. REPLACE THE UNUSED ONE WITH A FIXED RESISTOR. THE AD590 CAN BE REPLACED WITH A 30KΩ RESISTOR, THEN ADJUST TEMPERATURE TO READ 25°C. NOTE THAT ANY INSTRUMENT TEMPERATURE FUNCTIONS WILL BE INOPERATIVE IF THIS IS DONE.

SHIELDING

TAKE CARE NOT TO ALLOW THE BNC SHIELD (REFERENCE LEAD) TO CONTACT METAL PIPING OR J-BOXES AT ANY POINT, AS THIS WILL SHORT THE REFERENCE CELL TO EARTH GROUND, AND CAUSE UNSTABLE READINGS. SHIELDING OF THE CABLE FROM AMPLIFIER TO INSTRUMENT IS USUALLY NOT REQUIRED. IF A SHIELD IS USED, CONNECT IT AS SHOWN, AND MAKE SURE THAT IT DOES NOT TOUCH ANY OF THE OTHER LEADS, OR EARTH GROUND.

NOTES UNLESS OTHERWISE SPECIFIED:

		11751 Markon Drive	
		Garden Grove, CA. 92841 USA	
		phone: 714-895-4344 fax: 714-894-4839	
DRAWN 5/2/89 rh	TITLE		
CHECKED	SSA WITH SIGNET MK719		
APPROVED	SCALE NONE	DRAWING NO.	REV.
	SHEET 1 OF 1	SSA-719	B